


Marcado de los productos Exit-Sling según normativa CEN

Ejemplo: Marcado de las eslingas de uso general (EN 1492)

La siguiente información debe ir marcada, de forma legible e indeleble, sobre una etiqueta duradera fijada directamente sobre la eslinga.

Una sección de la etiqueta, con un duplicado de la información, debe quedar en el interior del cosido de la eslinga, para una buena trazabilidad.

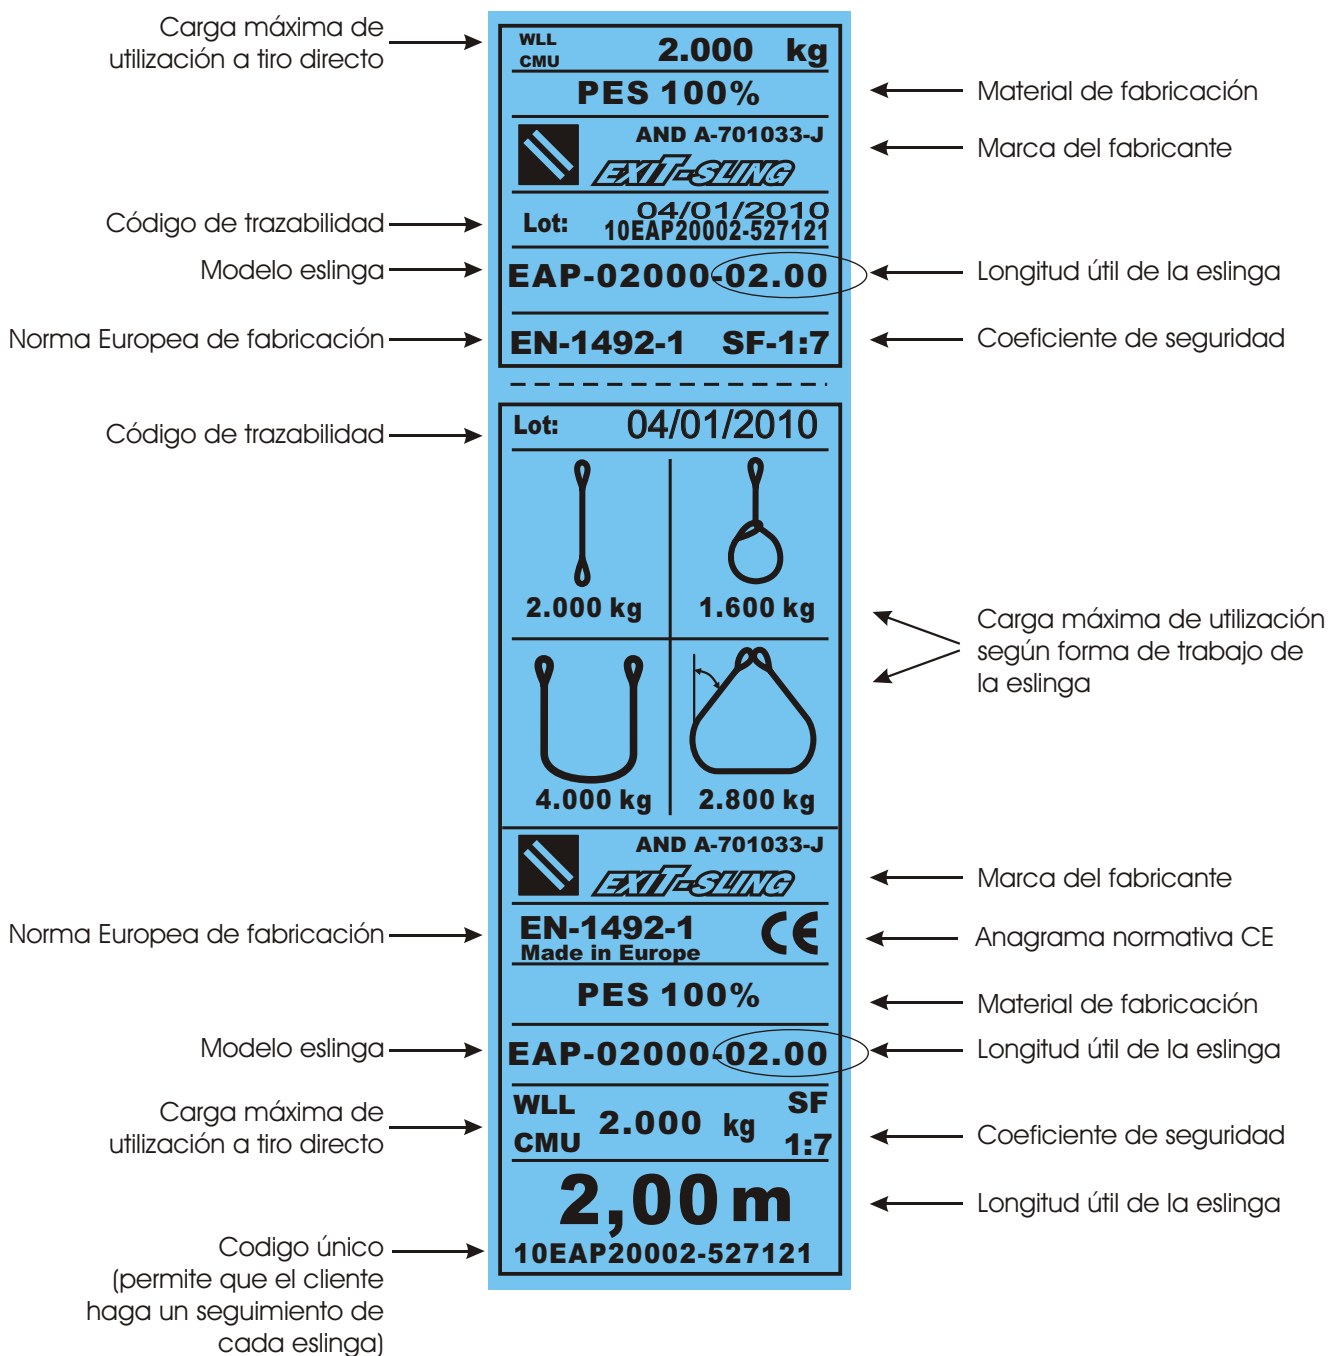

The diagram shows a vertical label for an Exit-Sling product, divided into two sections. The top section contains technical specifications and the bottom section contains usage instructions and a duplicate of the top section's information.

Top Section:

- WLL CMU 2.000 kg**: Maximum load for direct use.
- PES 100%**: Material of manufacture.
- AND A-701033-J**: Manufacturer's mark.
- EXIT-SLING**: Manufacturer's logo.
- Lot: 04/01/2010 10EAP20002-527121**: Traceability code.
- EAP-02000-02.00**: Sling model and useful length.
- EN-1492-1 SF-1:7**: European manufacturing standard and safety factor.

Bottom Section:

- Lot: 04/01/2010**: Traceability code.
- 2.000 kg** and **1.600 kg**: Maximum load for different hook configurations.
- 4.000 kg** and **2.800 kg**: Maximum load for different hook configurations.
- AND A-701033-J**: Manufacturer's mark.
- EXIT-SLING**: Manufacturer's logo.
- EN-1492-1** and **CE**: European manufacturing standard and CE mark.
- Made in Europe**: Origin of manufacture.
- PES 100%**: Material of manufacture.
- EAP-02000-02.00**: Sling model and useful length.
- WLL CMU 2.000 kg SF 1:7**: Maximum load and safety factor.
- 2,00 m**: Useful length of the sling.
- 10EAP20002-527121**: Unique code for client tracking.

Annotations:

- Carga máxima de utilización a tiro directo (Maximum load for direct use) points to WLL CMU 2.000 kg.
- Material de fabricación (Material of manufacture) points to PES 100%.
- Marca del fabricante (Manufacturer's mark) points to AND A-701033-J and EXIT-SLING.
- Código de trazabilidad (Traceability code) points to Lot: 04/01/2010 10EAP20002-527121.
- Modelo eslinga (Sling model) points to EAP-02000-02.00.
- Norma Europea de fabricación (European manufacturing standard) points to EN-1492-1 SF-1:7.
- Código de trazabilidad (Traceability code) points to Lot: 04/01/2010.
- Carga máxima de utilización según forma de trabajo de la eslinga (Maximum load according to working form of the sling) points to the four load diagrams.
- Marca del fabricante (Manufacturer's mark) points to AND A-701033-J and EXIT-SLING.
- Anagrama normativa CE (CE mark) points to CE.
- Material de fabricación (Material of manufacture) points to PES 100%.
- Modelo eslinga (Sling model) points to EAP-02000-02.00.
- Carga máxima de utilización a tiro directo (Maximum load for direct use) points to WLL CMU 2.000 kg SF 1:7.
- Coeficiente de seguridad (Safety factor) points to SF 1:7.
- Código único (permite que el cliente haga un seguimiento de cada eslinga) (Unique code (allows the client to track each sling)) points to 10EAP20002-527121.
- Longitud útil de la eslinga (Useful length of the sling) points to 2,00 m.